

# AweSome T4 Telecaster Upgrade Left-Hand Information


Updated: 04-21-2017

The following T4 telecaster upgrade information is for the left hand customer.

Left-handed customer can request the Volume-Tone controls are mounted so the Tone control is towards the rear and the Volume control is towards the neck of the instrument. The two controls will still be right-hand controls, but they will be positioned like your stock controls.

In addition, the below information identifies how to connect each of the four pairs of pickup coils to the green solderless terminal strip; as well as which pickup coil each switch controls.

The below figure shows the special left-hand layout of our T4 Telecaster upgrade.

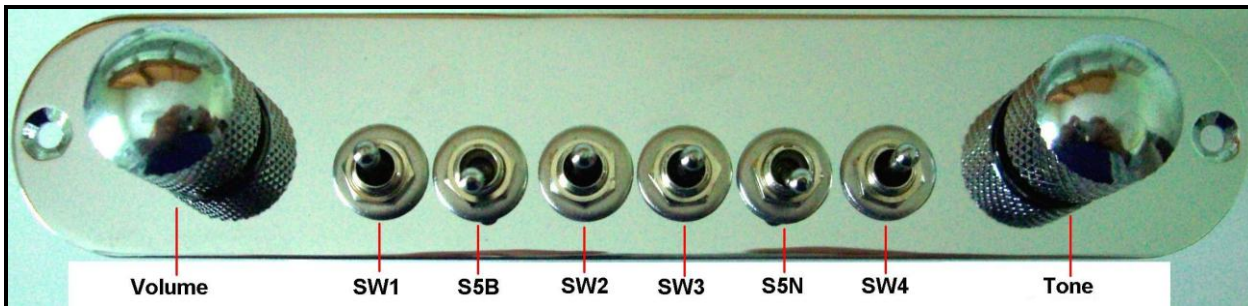

For your instrument with four separate pickup coils; either one 4-wire humbucker pickup or two 4-wire humbucker pickups, the following pickup coil wire pairs are attached to the marked connection of the green solderless terminal strip. This is done so the layout of the four separate coils on the guitar (from rear to front) match the switches.

Neck North Coil - attach to the green terminal strip marked Coil-1

Neck South Coil - attach to the green terminal strip marked Coil-2

Bridge North Coil - attach to the green terminal strip marked Coil-3

Bridge South Coil - attach to the green terminal strip marked Coil-4

For the Left-Hand user, the following switches control the identified coils. Apply this "reversal" to the normal pickup tone mapping worksheet.

SW1: Controls the North Neck Coil.

S5B: Puts these two Neck coils in Parallel or Series.

SW2: Controls the South Neck Coil.

SW3: Controls the North Bridge Coil.

S5N: Puts these two Bridge coils in Parallel or Series.

SW4: Controls the South Bridge Coil.